

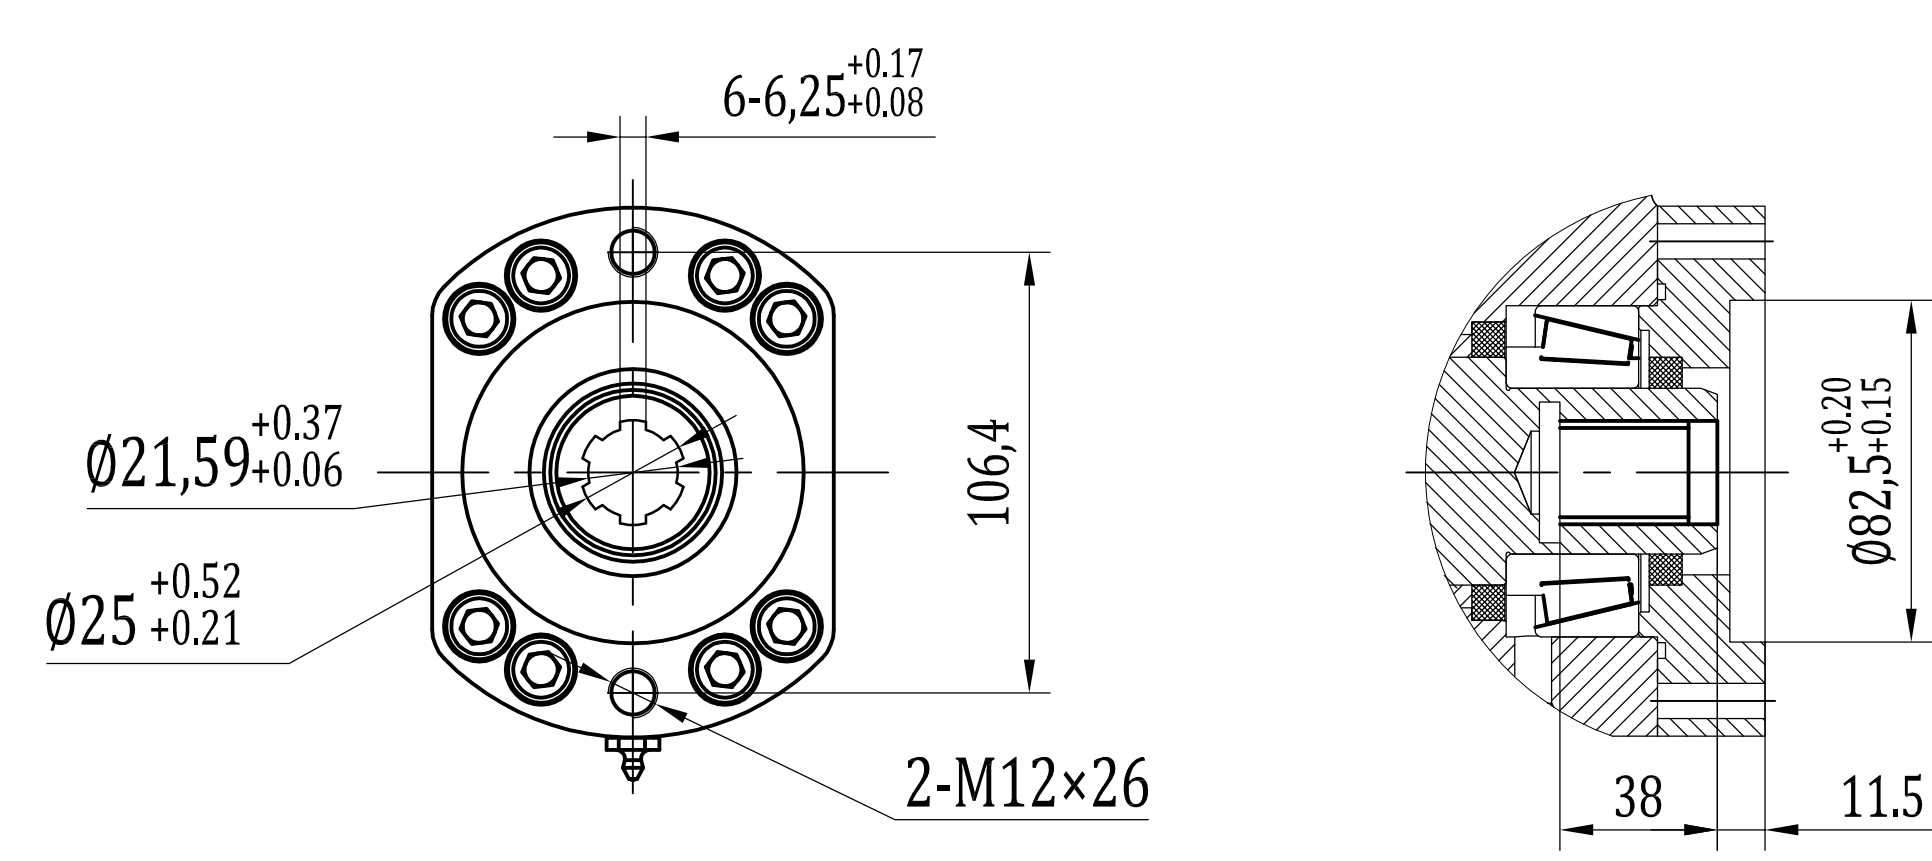
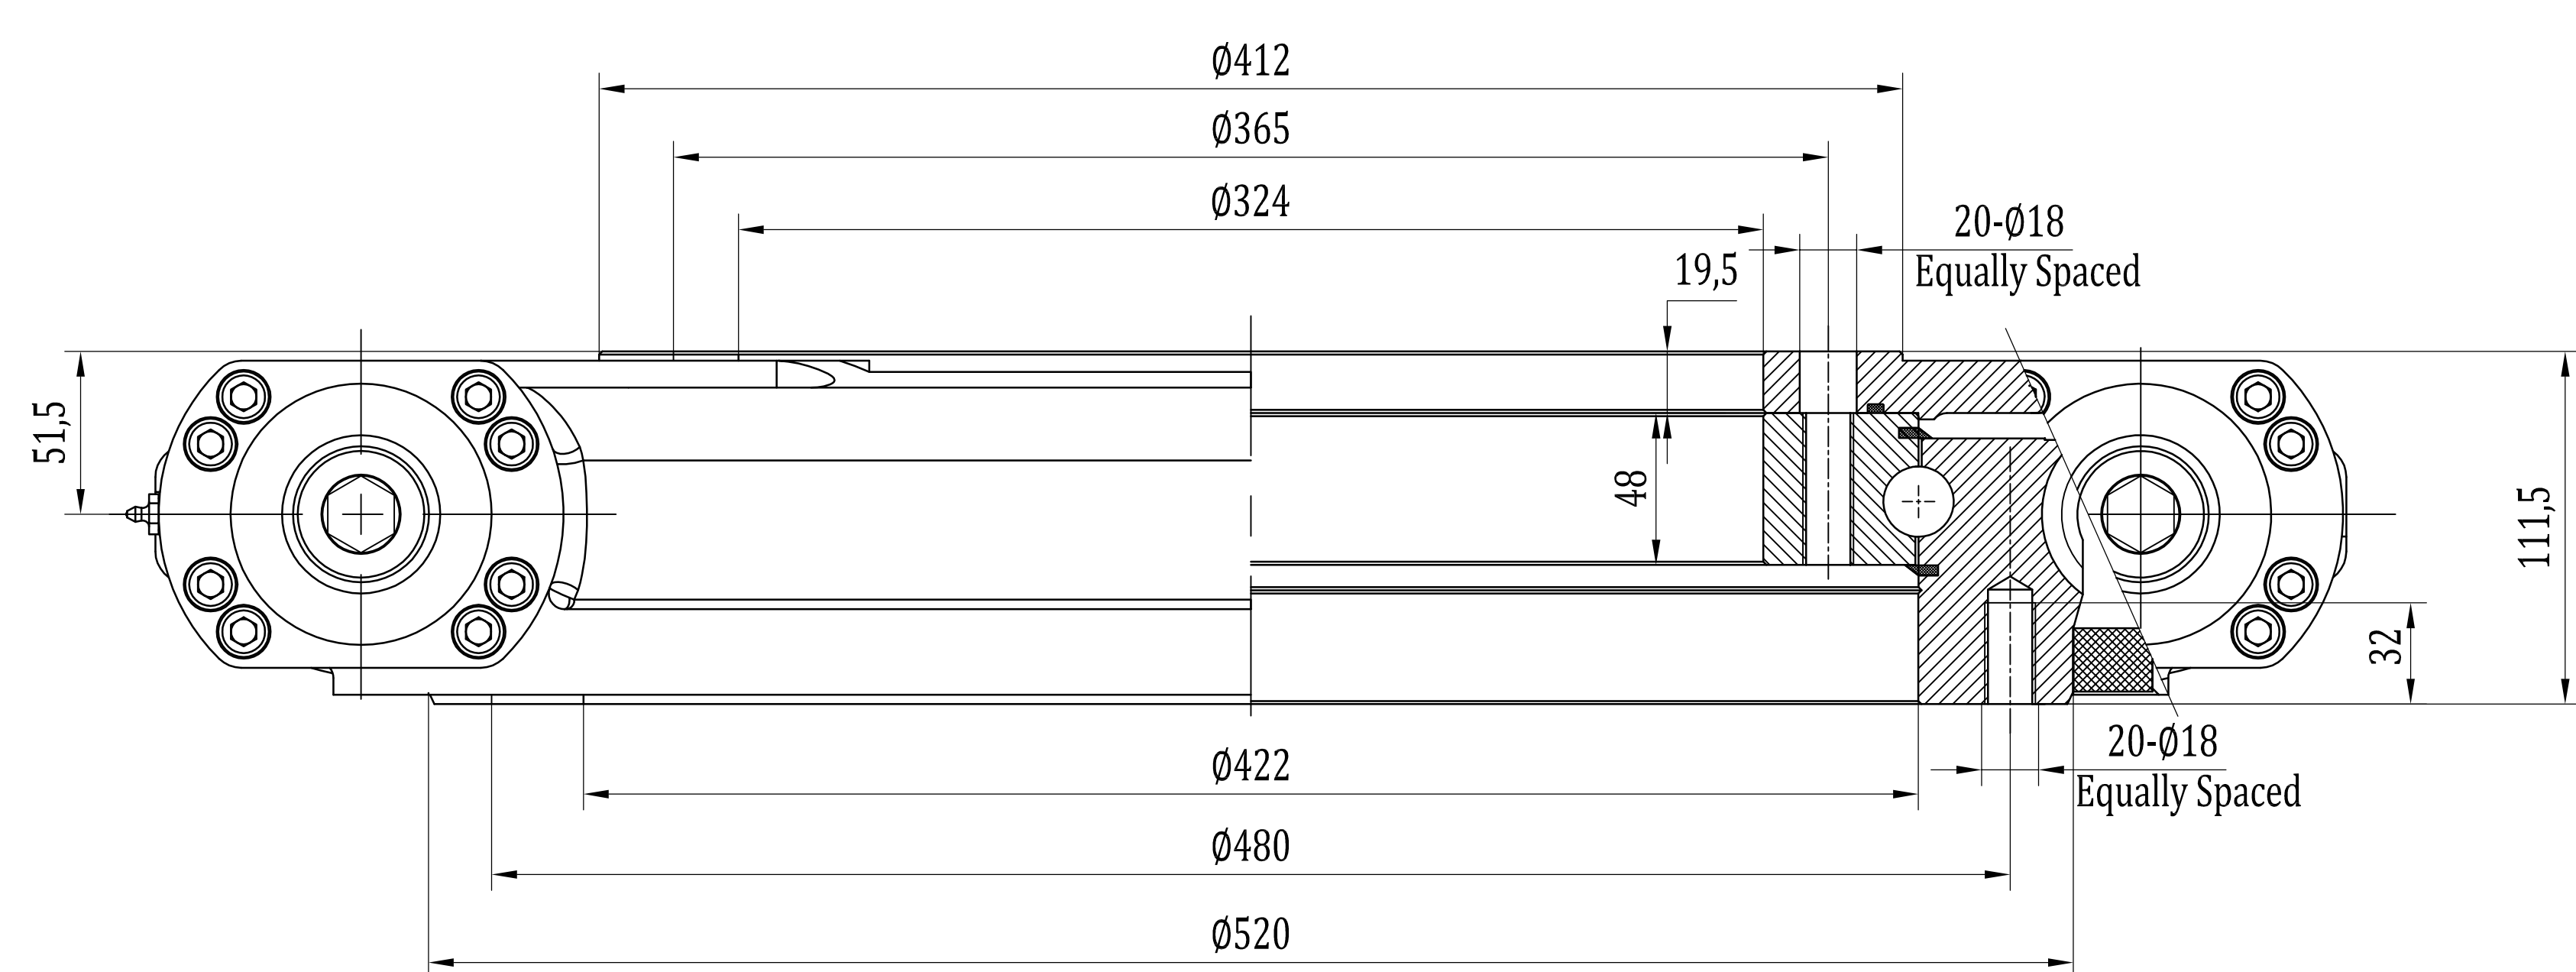
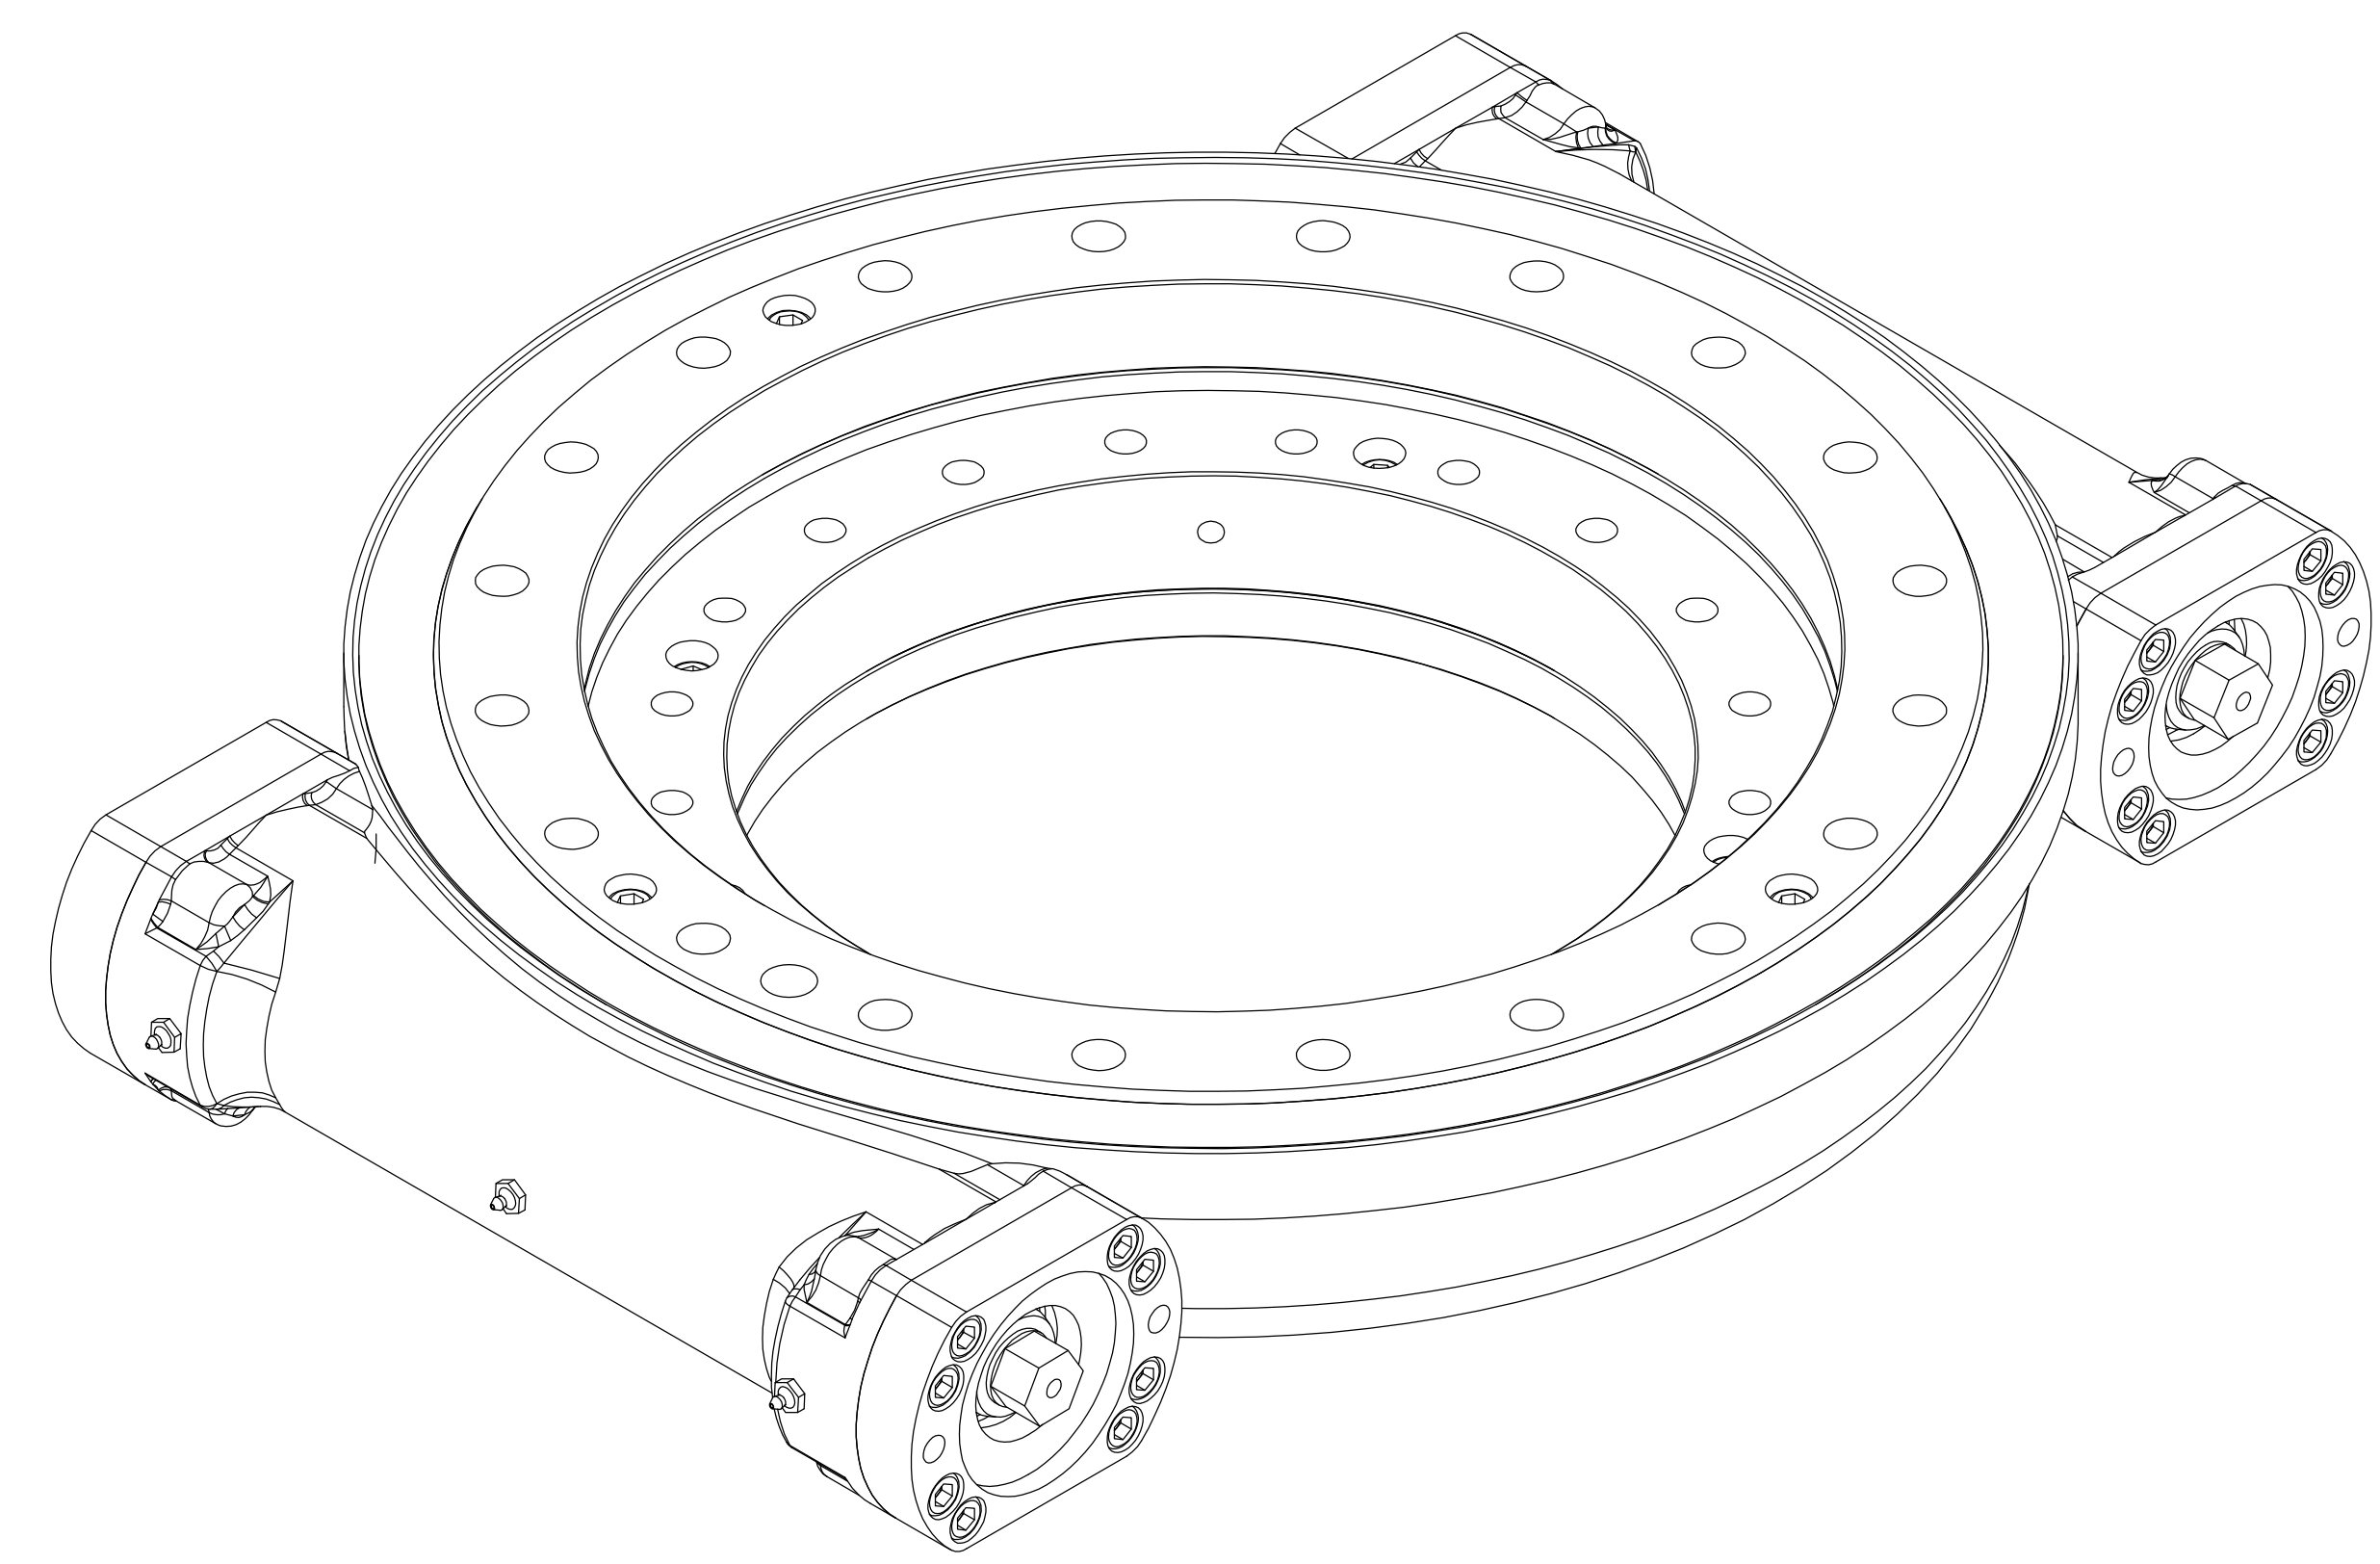
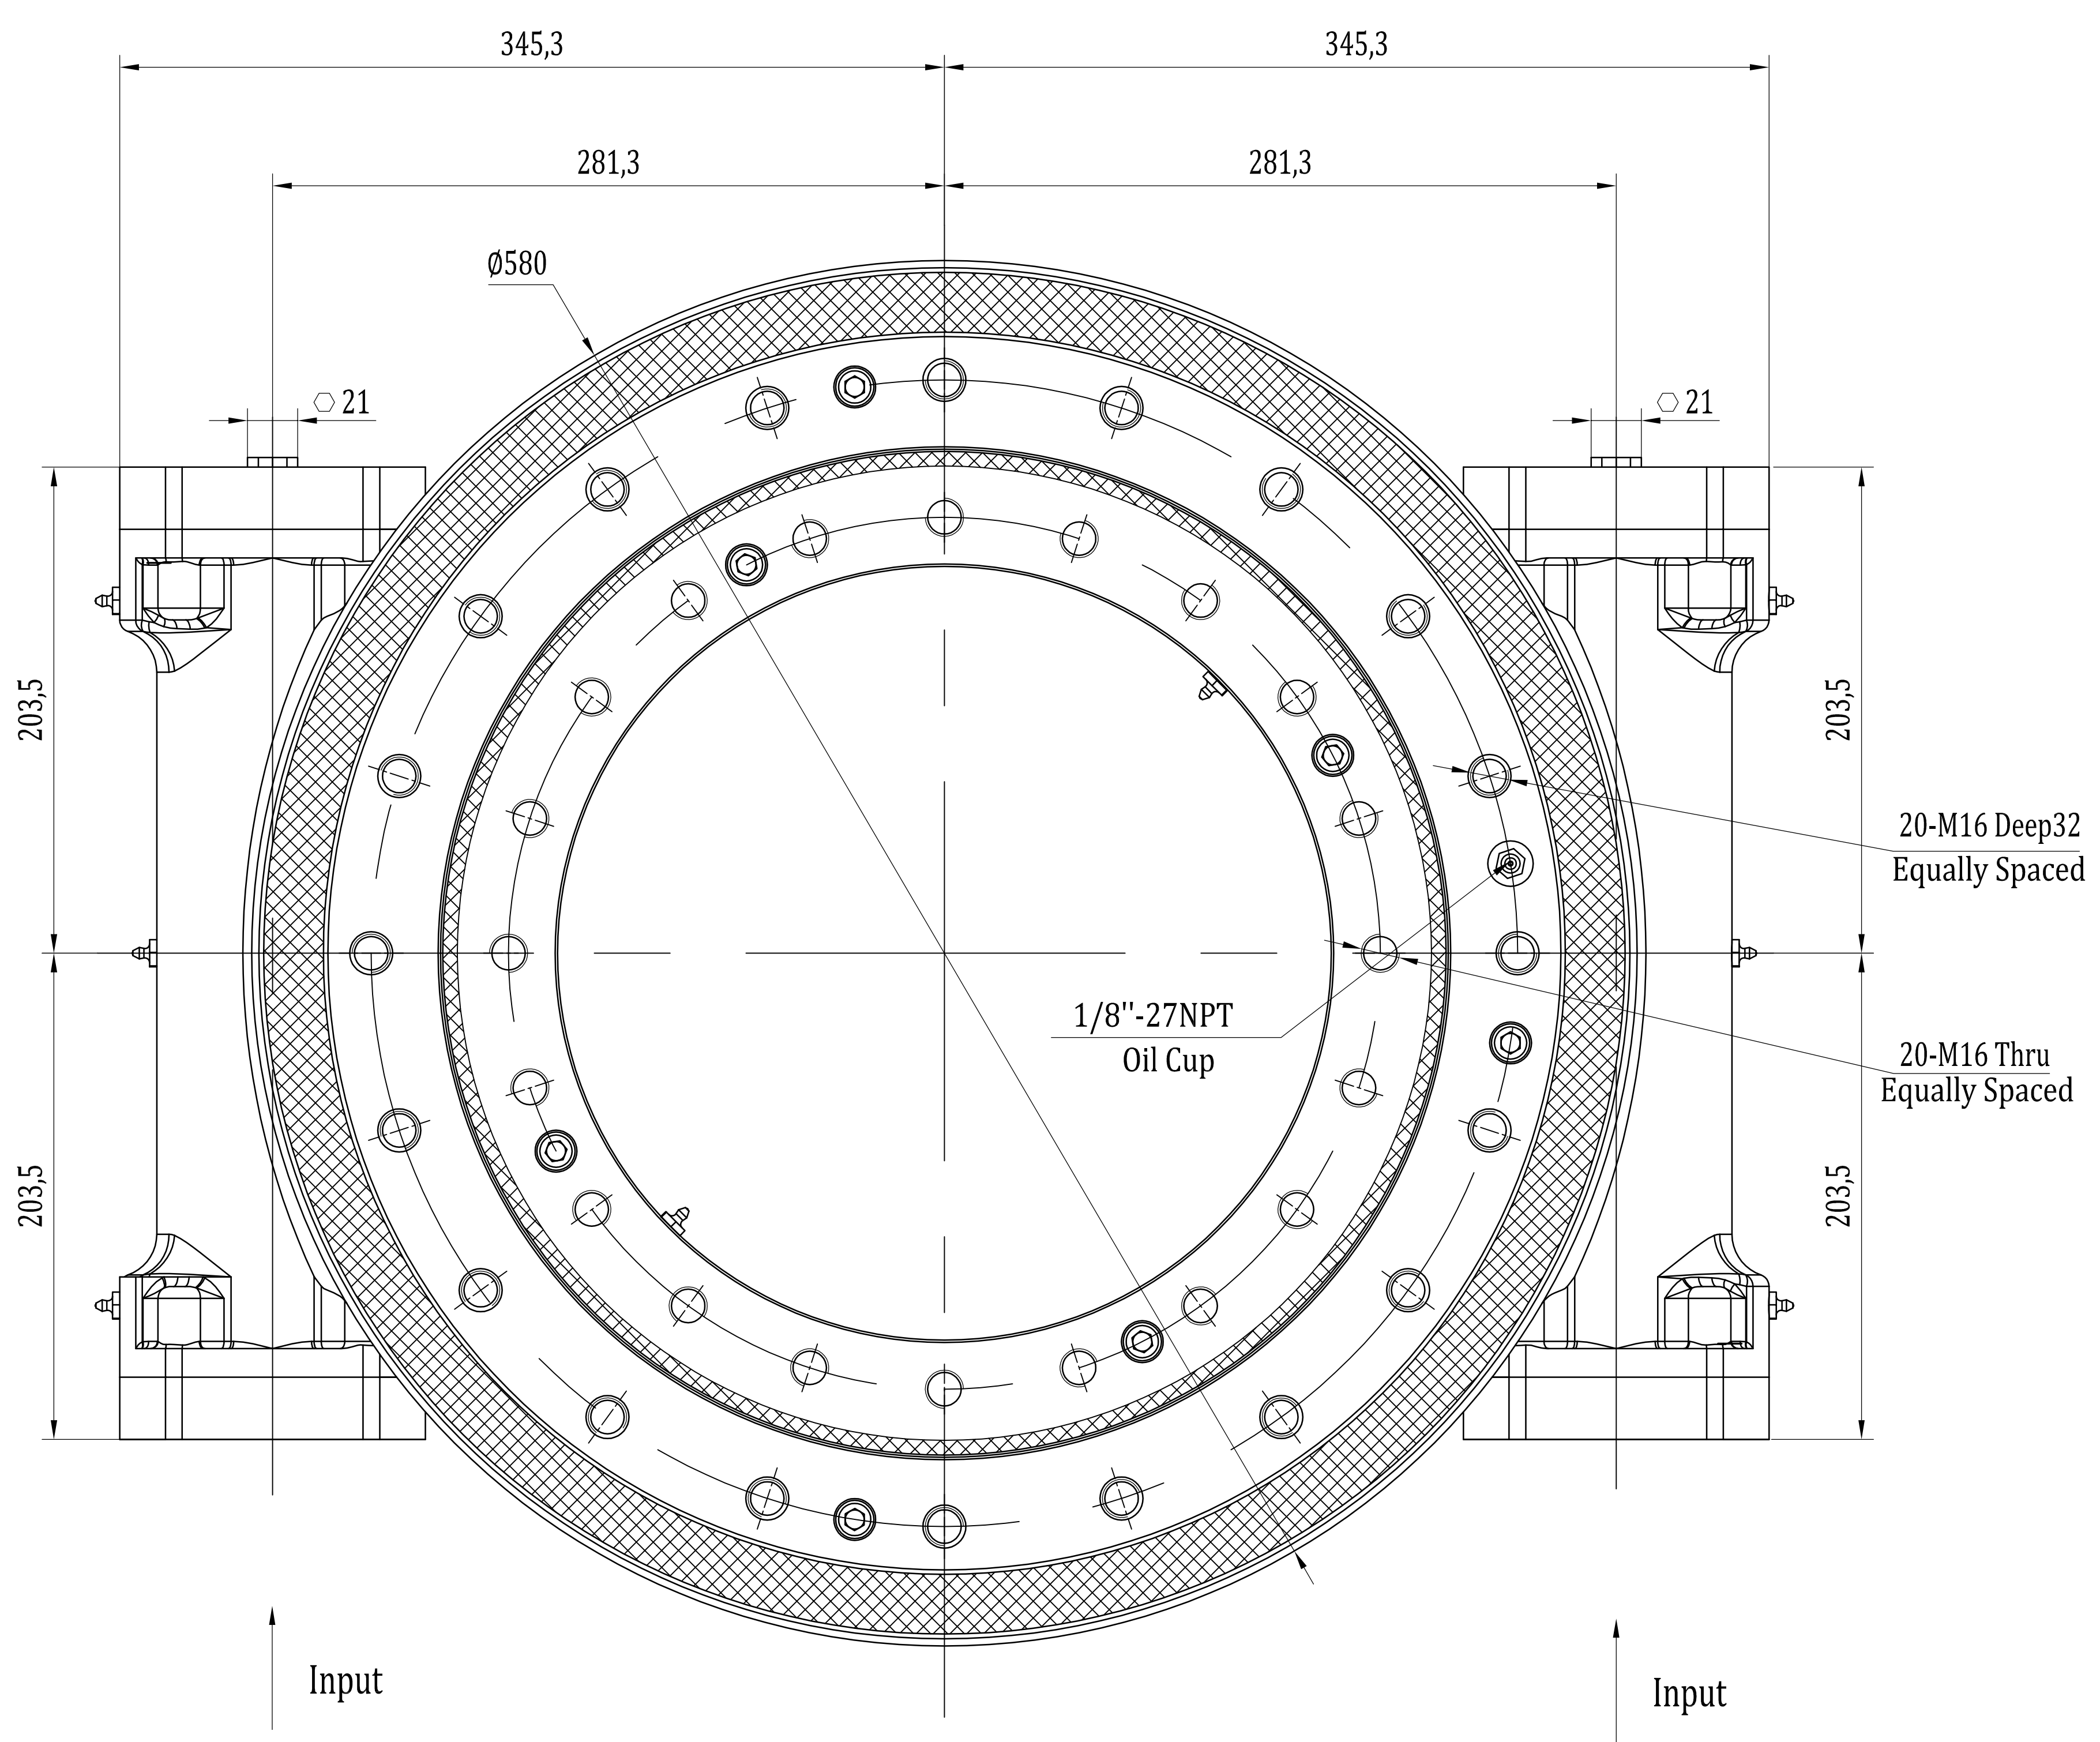


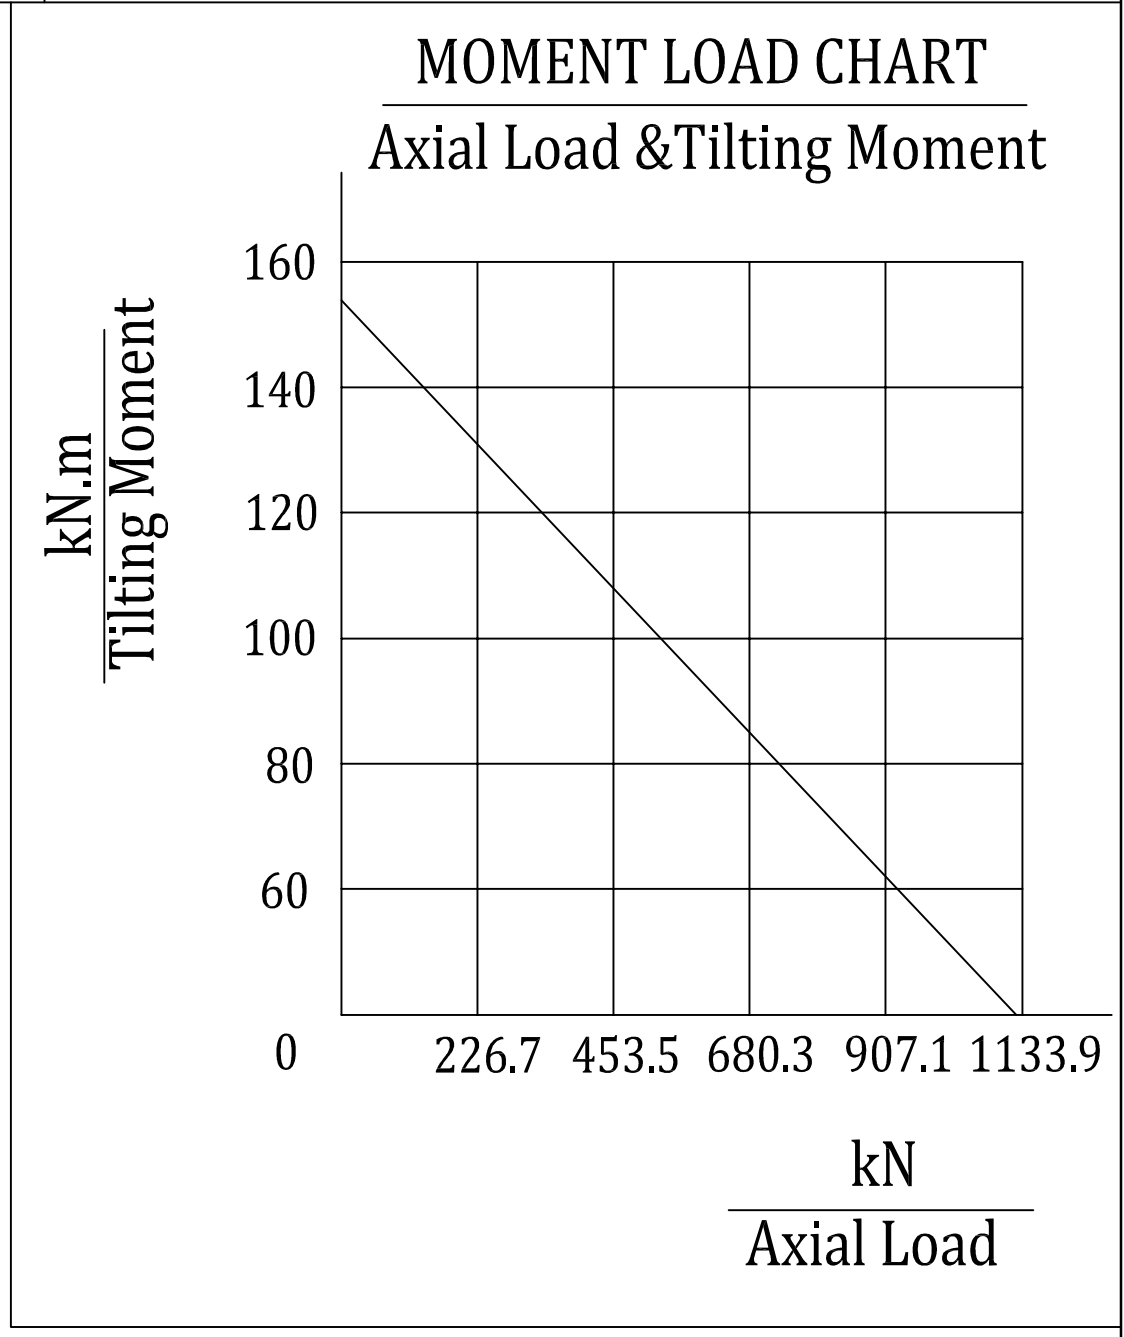

Slewing Drive Performance Parameters		
Rated Output Speed (max)	<3rpm	
Output Torque (max)	40 kN.m	29.5x10 ³ lbf.ft
Tilting Moment	160 kN.m	118x10 ³ lbf.ft
Holding Torque	152 kN.m	112x10 ³ lbf.ft
Static Axial Load Rating	1110 kN	249.8x10 ³ lbf
Static Radial Load Rating	414 kN	93.2x10 ³ lbf
Gear Ratio	102:1	
Precision	≤0.17°	



REV	DATE	REVISER	REVISER			
DESIGNED BY	2020/5/19	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2020/5/19	Rui Wang				
APPROVED BY	2020/5/19	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
				1 : 4		
SYMBOL ISO		SIZE	A3	WH17-2-102-BRH-A270		REV
		SHEET	1 / 1			A